

GRIPPS®

H06011 GAP WRAP 24"

GRIPPS® Gap Wrap provides a swift and easy means for covering difficult floor penetration areas and its easily re-used from job to job. The mesh of the GRIPPS® Gap Wrap 24" encases pipes from 2" to 24" (50mm to 610mm) in diameter and uses heavy-duty Velcro strips to tighten the opening to tubes.


Eliminate the need for labour-intensive custom cutting of chipboard sheets for your encapsulation projects. Save both time and money by opting for GRIPPS® Gap Wrap - an innovative solution that creates a robust physical barrier, safeguarding against potential hazards by preventing openings and dropped objects. Enhance safety for workers and bystanders beneath the work area with this efficient and cost-effective alternative.



THE LEADERS IN FALLING OBJECT PREVENTION

GRIPPS.COM

KEY FEATURES

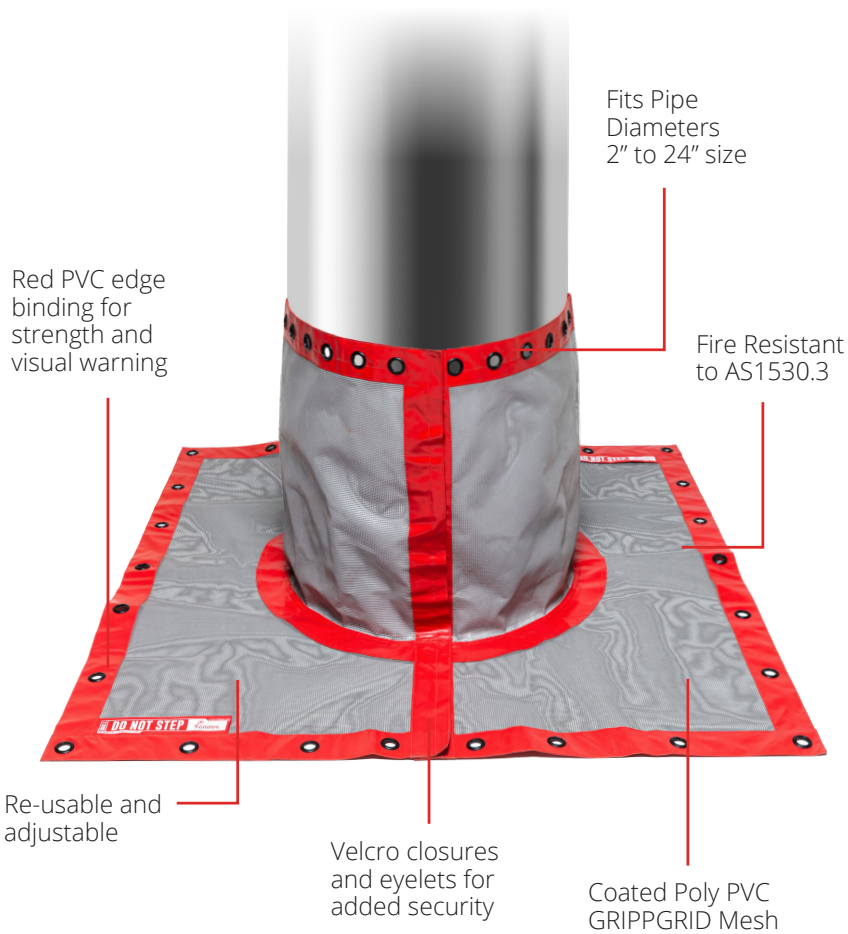

HOW TO USE

1

Surround the pipe with Gap Wrap, overlapping the central Velcro fasteners strips.

* Do not use on a void that exceeds 100mm.

2

Ensure the fastener strip is firmly pressed all the way along from top to bottom. Fasten all eyelets around the piping with suitable ties.

3

Fasten all outer eyelets to gridmesh with suitable ties. Ensure no excessive amount of ties are exposed that may cause a trip hazard.

SPECIFICATIONS

SKU	SIZE	PIPE DIAMETER SIZE
H06011	24"	2"-24" 50MM-610MM

LENGTH	WIDTH	HEIGHT	FIRE RESISTANCE
1400MM 55"	1400MM 55"	650MM 24"	AS1530.3

@GRIPPSGLOBAL



#ConquerGravity