

# GRIPPS®

ANSI/ISEA  
121-2018  
COMPLIANT

## H01040 **PATENT PENDING** GRIPPLOCK CABLE - 3MM X 120MM

**1** KG **2.2** LB

**MAX LOAD:**

*The GRIPPS® Gripplock Cable quickly forms a permanent tether connection from existing hang-holes or slots within seconds. Made from aircraft-grade steel, the fully load-rated and certified GRIPPS® Gripplock Cable ensures both reliability and durability.*

Easily create a secure tool connection point by simply threading the GRIPPS® Gripplock Cable through your tool's existing hang-hole or slot and locking the heads together. No additional thread-locking compound required.

Available in a 5-pack or 10-pack only. Not sold individually.



### OTHER SIZE AVAILABLE

SKU	MAX LOAD	WIDTH	LENGTH
H01041	1KG   2.2LB	3MM   0.1IN	150MM   5.9IN



ENGINEERED FOR DROP PREVENTION

GRIPPS.COM

## KEY FEATURES

Long lasting and durable PU-coated aircraft-grade steel.

Easy and permanent installation process.


Load-rated

Gripplock locking heads with patent pending.




## HOW TO USE

1

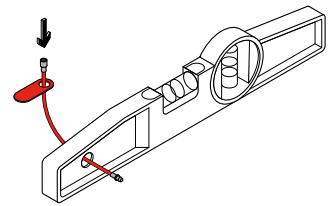


Feed the Gripplock Cable through the pre-formed hole in the tool.

2

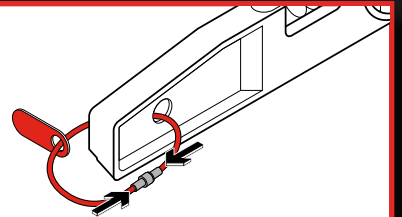

Join the two ends together, ensuring a firm application and click sound is heard/felt. Test that Gripplock Cable cannot be separated by tugging both ends firmly.

3

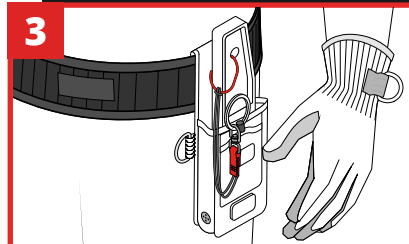

Your Gripplock Cable is now ready to connect with a suitable GRIPPS® tether.

## SPECIFICATIONS

SKU	MAX LOAD	WIDTH	LENGTH
H01040	1KG   2.2LB	3MM   0.1IN	120MM   4.7IN

@GRIPPSGLOBAL



#ConquerGravity