

# GRIPPS®

ANSI/ISEA  
121-2018  
COMPLIANT

## H01005-5 / H01005-10 TOOL CATCH - 12MM X 55MM

*The GRIPPS® Tool Catch offers a sturdy, dependable, and long-lasting retrofit tool connection solution for a wide range of hand tools.*

Secure the GRIPPS® Tool Catch onto your tool using GRIPPS® V-Gripp Tape to establish a certified, load-rated tool connection point capable of withstanding rigorous industrial environments.

Sold in 5-packs and 10-packs.

1 KG

2.2 LB

MAX LOAD



ENGINEERED FOR DROP PREVENTION

GRIPPS.COM

## KEY FEATURES



Robust Nylon for maximum strength and durability.

Easy installation process that can be done onsite.

Fully certified and load-rated when used with GRIPPS® V-Gripp Tape.

Closed and welded D-ring to prevent warping with use.


\* Available in two sizes and in non-conductive.

## SPECIFICATIONS

SKU	MAX LOAD	SIZES
H01005-5	1KG   2.2LB	12MM X 55MM   0.4IN X 2.1IN
H01005-10	1KG   2.2LB	12MM X 55MM   0.4IN X 2.1IN
H01006-5	2.5KG   5.5LB	25MM X 90MM   0.9IN X 3.5IN
H01006-10	2.5KG   5.5LB	25MM X 90MM   0.9IN X 3.5IN


## HOW TO USE

**1**




Place Tool Catch with metal D-ring facing away from the tool's center of gravity with the white tag facing up.

**2**



Wrap the GRIPPS® V-Gripp Tape around the tool 10 x while stretching the tape to activate the self-vulcanising feature, creating a secure connection. Ensure the raised catch is not covered by the tape. Pull on the Tool Catch with force to test application.

**3**

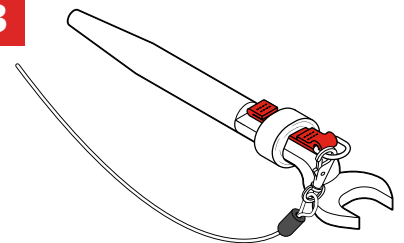

Your Tool Catch is now ready to be connected with a suitable GRIPPS® tool tether using the D-ring.

@GRIPPSGLOBAL



#ConquerGravity